

ROSETTA

Visit one of our showrooms or learn more at midlandconcreteproducts.com

Clear Lake • 641.357.2176 | Marshalltown • 800.542.0015 | Waterloo • 800.747.8421 | Hiawatha • 319.393.3531


M FEATURES

- Authentic, natural slate texture
- Consistent 2” thickness
- Uniform thickness and accurate dimensions = fast installation and a beautiful end result
- Optimal for rooftop pedestal installations

M 24 x 24 MIROS PALLET

- 64 sq ft / pallet
- 600# / pallet
- 16 pc / pallet
- 1 pc = 4 sq ft


PATIO LAYOUTS

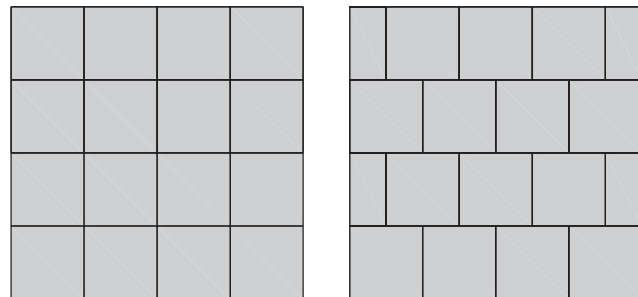

STACK BOND

RUNNING BOND

M 24x24 MIROS CROSS-SECTION (On-grade Installation)**

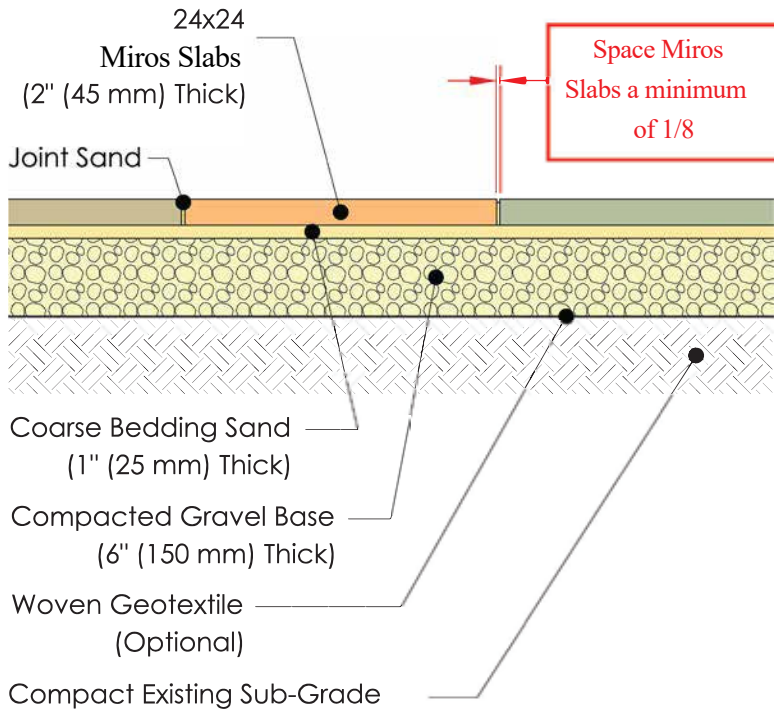

***24x24 Miros slabs must be spaced apart a minimum of 1/8". These slabs were originally developed for use with roof-top pedestal mount systems. On-grade installations require manually spacing the slabs apart. This can be achieved using a pair of 1/8" wooden shims or by using removable tiles spacers. Failure to provide a relief joint will restrict the seasonal flexibility of the patio.*